

## Cost Analysis of NEMO Protocol Entities

Md. Shohrab Hossain, Mohammed Atiquzzaman, William Ivancic<sup>†</sup>

School of Computer Science, University of Oklahoma, Norman, OK 73019

<sup>†</sup>NASA Glenn Research Center, Cleveland, OH 44135

shohrab@ou.edu, atiq@ou.edu, wivancic@grc.nasa.gov

### Abstract

To support IP-mobility of networks in motion, IETF proposed Network Mobility (NEMO) protocol that uses various signaling messages to ensure connectivity of the mobile nodes with the Internet. However, there has been no comprehensive cost analysis of mobility protocol entities that considers all possible costs. In this paper, we have developed analytical models to estimate total costs of key mobility management entities of NEMO. We have presented numerical results to demonstrate the impact of network size, mobility rate, traffic rate and data volume on these costs. Our cost analysis will thus help network engineers in estimating actual resource requirements for the key entities of the network in future design.

**Keywords:** NEMO, mathematical modeling, cost analysis, mobility management.

### I. INTRODUCTION

To ensure continuous Internet connectivity of networks in motion, IETF proposed Network Mobility Basic Support Protocol (NEMO BSP) [1] which is an extension of IETF host-mobility protocol, Mobile IPv6 [2]. NEMO BSP requires different mobility agents to exchange various signaling messages to maintain continuous connectivity and security of ongoing sessions between mobile nodes and Internet nodes.

In a mobile computing environment, a number of network parameters (such as, network size, mobility rate, traffic rate) influence the cost arising from mobility protocols. These cost include costs related to query messages, updating Home Agents about the change of location of the mobile entity, sending updates to hosts with ongoing communication, and processing and lookup costs by various mobility agents. As the next-generation wireless/mobile network will be a unified network based on all-IP technology, and the number of mobile nodes requiring mobility support has increased significantly, the cost analysis of mobility protocols as well as the underlying mobility management entities (e.g., home agents, mobile router, etc.) have become essential to avoid performance degradation of the mobility protocol.

There has been earlier attempts for signaling cost analysis ([3]–[6]) of mobility protocols. Xie et al. [3] performed cost analysis of Mobile IP to minimize the signaling cost while introducing a novel regional location management scheme. Fu et al. [4] analyzed the signaling costs of SIGMA and HMIPv6. Makaya et al. [6] presented an analytical model for the performance and cost

analysis of IPv6-based mobility protocols. Reaz et al. [5] performed the signaling cost analysis of SINEMO. However, these analysis did not consider all possible costs (e.g. costs for sending query message by CN, securing location updates, obtaining IP address by MH, etc.) and they did not compute the signaling costs on various mobility entities.

The main differences of this work are that we have considered all possible costs required for mobility management and have computed total costs on various mobility management entities of NEMO. The authors are not aware of any such work.

The objective of this work is to analyze the total cost (including data delivery cost) of various mobility entities of NEMO basic protocol and figure out how those costs are affected by various network parameters, such as network size, mobility rate, traffic rate, and data volume.

The contributions of this work are: (i) developing mathematical models to estimate total costs of various mobility management entities of NEMO: home agent for mobile router, home agent for mobile host, mobile router, and complete network and (ii) analyzing the impact of network size, mobility rate, traffic rate, and data volume on these costs.

The analytical cost model developed in this paper covers all possible costs required for mobility management and will help in estimating the actual resources (bandwidth, processing power, transmission power) required by key entities of the network in order to maintain continuous connectivity with remote Internet hosts and securing the ongoing session.

The rest of the paper is organized as follows. In Section II, NEMO architecture and BSP are briefly explained. In Section III, analytical cost models of various entities of NEMO are presented. Section IV analyzes the results. Finally, Section V has the concluding remarks.

### II. NETWORK MOBILITY

Here, we explain briefly NEMO architecture and NEMO BSP which will aid in understanding the cost analysis.

#### A. NEMO Architecture

Fig. 1 shows the architecture of a Mobile Network (MN). Mobile Router (MR) act as gateways for the nodes inside the MN, each of the nodes are called a Mobile Network Node (MNN). Different types of MNNs are: Local Fixed Nodes (LFN) that do not move with respect to MN, Local Mobile Nodes (LMN) that usually reside in MN

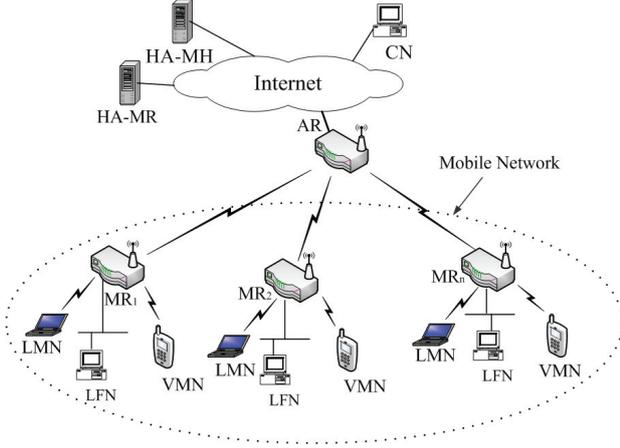


Fig. 1. NEMO Architecture

and can move to other networks, and Visiting Mobile Nodes (VMN) that get attached to the MN from another network. LMNs and VMNs are MIPv6 capable, and we refer them as *mobile nodes*. The MR attaches to the Internet through Access Routers (ARs).

## B. NEMO BSP

In NEMO BSP [1], the MR ensures Internet connectivity of all the MNNs while moving from a home network to a foreign network. An MR has its unique IP address and one or more MN Prefixes (MNP) that it advertises to the hosts attached to it. MR establishes a bidirectional tunnel with the HA of Mobile Hosts (HA-MH) to pass all the traffic between its MHs and the Correspondent Nodes (CNs). When MR changes its point of attachment, it acquires a new care-of-address from the visited foreign network. It then sends a Binding Update (BU) to its HA which creates a cache entry, binding MRs home address with its care-of-address, and creates a bidirectional tunnel between HA and MR. When a CN sends a packet to a host, the packet is routed to the HA of the corresponding MR (HA-MR). HA-MR looks at its cache entry and forwards the packet to the MR using the bidirectional tunnel. Finally, MR receives the packet, decapsulates it, and forwards it to the host inside the MN.

## III. COST ANALYSIS

We compute below the mobility management cost on NEMO's key entities, such as, HA-MR, HA-MH, MR and the complete network.

### A. Notations

The notations used in cost analysis are listed below.

$N_r$	Number of MRs in the MN,
$N_f$	Number of LFNs in the MN,
$N_l$	Number of LMNs in the MN,
$N_v$	Number of VMNs in the MN,
$N_{mnn}$	Total MNNs in MN; $N_{mnn} = N_f + N_l + N_v$ ,
$N_m$	Total mobile nodes in MN, i.e., $N_m = N_l + N_v$ ,
$N_c$	Total CNs communicating with MNNs,

$\delta_L$	Per hop transmission cost for Location Update,
$\delta_B$	Per hop transmission cost for Binding Update,
$\delta_Q$	Per hop transmission cost for query message,
$\delta_{DT}$	Per hop transmission cost for each data packet,
$\delta_{DA}$	Per hop transmission cost for each (data) Ack packet,
$\delta_{RR}$	Per hop transmission cost for Return Routability (RR) message,
$\delta_{DH}$	Per hop transmission cost for DHCPv6 message,
$\delta_{TH}$	Transmission cost for extra IP header (tunneling),
$\gamma_t$	processing cost for tunneled packet,
$\gamma_r$	processing cost at MR,
$\sigma$	Proportionality constant (for transmission cost) of wireless link over wired link,
$\psi$	Linear coefficient for lookup cost,
$T_r$	Subnet residence time,
$\lambda_s$	Average session arrival rate,
$h_p$	average number of hops between Internet to arbitrary CN, HA or AR,
$h_{in}$	average number of hops in the Internet,
$\omega_l$	Ratio of number of LMNs to total MNNs,
$\omega_f$	Ratio of number of LFNs to total MNNs,
$\omega_v$	Ratio of number of VMNs to total MNNs,
$\kappa$	Maximum transmission unit,
$\alpha$	Average session length.

## B. Assumptions

Following are the assumptions of the model:

- All the MRs have the same HA which is HA-MR.
- HA-MR is the HA for MRs, LFNs and LMNs.
- HA-MH has been considered to be HA of all the VMNs as they belong to some other networks.
- Session arrival rate for each mobile host is equal.
- The data (file) size in each session is equal.
- Each CN has one ongoing session with a MNN.
- Binary search is used to search location database.

## C. HA-MR

The main tasks of HA-MR are processing 1) query messages from CNs, 2) Location Update (LU) messages from MRs, 3) RR test messages, 4) BU messages to CNs, and 5) data delivery cost.

1) *Query message*: The fraction of CNs that communicate with either with a LMN or a LFN are  $(\omega_l + \omega_f)N_c$ . These CNs send query message to HA-MR at the start of each session, requiring a lookup cost of  $\Psi_{HA-MR}^{LK} = \psi \log_2(N_r + N_f + N_l)$  and transmission cost for query-reply messages. Hence, costs at HA-MR is:

$$\Lambda_{HA-MR}^{QR} = (\omega_l + \omega_f)N_c\lambda_s \left[ 2\delta_Q + \Psi_{HA-MR}^{LK} \right] \quad (1)$$

2) *Location update messages*: When the MN crosses subnets, MR sends LU message to the HA-MR which sends back acknowledgement. This happens in every  $T_r$  seconds. In addition, MRs and mobile nodes send periodic refreshing updates to HA-MR so that the entries are not removed from location database. Let the lifetime of the

entries in the location database be  $T_e$ . Therefore,  $\lfloor \frac{T_r}{T_e} \rfloor$  refreshing updates are sent to HA-MR within the time  $T_r$  and the frequency of refreshing updates is  $\eta_r = \lfloor \frac{T_r}{T_e} \rfloor / T_r$ , and total frequency of LU is  $\eta_t = \left(1 + \lfloor \frac{T_r}{T_e} \rfloor\right) / T_r$ . Each LU and corresponding acknowledgement messages incur transmission and processing cost. The LU messages from LMNs go through one level of encapsulation which cost additional transmission cost of  $\delta_{TH}$  and a processing cost of  $\gamma_t$  whereas the LU messages from the MR go without encapsulation. In both cases, a lookup cost of  $\Psi_{HA-MR}^{LK}$  is required. Thus,

$$\Lambda_{HA-MR}^{LU} = \eta_t N_r \left[ 2\delta_L + \Psi_{HA-MR}^{LK} \right] + \eta_r N_l \left[ 2(\delta_L + \delta_{TH} + \gamma_t) + \Psi_{HA-MR}^{LK} \right] \quad (2)$$

3) *Return routability messages*: NEMO employs RR test before sending BU to the HA similar to MIPv6 [2]. RR messages are exchanged among the MR, HA and CN. The HA-MR receives the Home Test Init (HoTI) message sent by the MR and forwards it to the CN. HA-MR also receives the Home Test (HoT) message from the CN and sends it back to MR. The HA-MR receives these RR messages for all CNs that are communicating with LMN. Therefore,

$$\Lambda_{HA-MR}^{RR} = N_l \left( \frac{N_c}{N_{mnn}} \right) \frac{4\delta_{RR}}{T_r} \quad (3)$$

4) *Binding updates to CNs*: To continue ongoing sessions with the CNs, LMNs send refreshing BU to the CNs by tunneling through HA-MR which costs lookup, tunneling and transmission costs as follows.

$$\Lambda_{HA-MR}^{BU} = 2\omega_l N_c \eta_r \left[ \delta_B + \delta_{TH} + \gamma_t + \Psi_{HA-MR}^{LK} \right] \quad (4)$$

5) *Data delivery cost*: In every session, the first data packet is sent through HA-MR and the rest through direct path [2]. This is also true for VMNs. This incurs transmission cost of data and ACK packets, extra IP-header processing and transmission cost as well as lookup cost as follows:

$$\Lambda_{HA-MR}^{DD} = N_c \lambda_s \left[ \delta_{DT} + \delta_{DA} + 2(\delta_{TH} + \gamma_t + \Psi_{HA-MR}^{LK}) \right] \quad (5)$$

6) *Total cost*: Thus, the total cost of the HA-MR can be obtained by adding Eqns. (1), (2), (3) (4), and (5):

$$\Lambda_{HA-MR} = \Lambda_{HA-MR}^{QR} + \Lambda_{HA-MR}^{LU} + \Lambda_{HA-MR}^{RR} + \Lambda_{HA-MR}^{BU} + \Lambda_{HA-MR}^{DD} \quad (6)$$

## D. HA-MH

The HA-MH serves as the location manager of the VMNs and the main tasks of the HA-MH are 1) processing the query message, 2) processing LU messages, 3) RR messages of the VMNs, and 4) data delivery cost.

1) *Query message*: The fraction of CNs that communicate with the VMN are  $\omega_v N_c$  and they send query message to the HA-MH at the beginning of every session. This incurs transmission and lookup as follows:

$$\Lambda_{HA-MH}^{QR} = \omega_v N_c \lambda_s \left[ 2\delta_Q + \psi \log_2 N_v \right] \quad (7)$$

2) *Location update messages*: Each VMN sends LU and refreshing LU to the HA-MH which incurs transmission, and lookup cost as follows:

$$\Lambda_{HA-MH}^{LU} = N_v \eta_t \left( 2(\delta_L + \delta_{TH} + \gamma_t) + \psi \log_2 N_v \right) \quad (8)$$

3) *Return routability messages*: Each VMN sends RR messages through HA-MH which costs the following:

$$\Lambda_{HA-MH}^{RR} = N_v \left( \frac{N_c}{N_{mnn}} \right) \frac{4\delta_{RR}}{T_r} \quad (9)$$

4) *Data delivery cost*: The first data packet from the CN travel through HA-MH and HA-MR to reach the VMN. This requires transmission, extra IP-header processing and lookup cost at HA-MH as follows:

$$\Lambda_{HA-MH}^{DD} = \omega_v N_c \lambda_s \left[ \delta_{DT} + \delta_{DA} + 2(\delta_{TH} + \gamma_t + \psi \log_2 N_v) \right] \quad (10)$$

5) *Total cost*: Thus, the total cost of the HA-MR can be obtained by adding Eqns. (7), (8), (9), and (10):

$$\Lambda_{HA-MH} = \Lambda_{HA-MH}^{QR} + \Lambda_{HA-MH}^{LU} + \Lambda_{HA-MH}^{RR} + \Lambda_{HA-MH}^{DD} \quad (11)$$

## E. Mobile Router

The main tasks of each MR are 1) IP address and prefix acquisition, 2) sending LU messages to HA-MR, 3) sending binding updates to the CNs, 4) processing RR messages, and 5) processing data packets.

1) *Acquiring IP address and prefixes*: MRs acquire IP address from the foreign network during each handoff by exchanging DHCPv6 request-reply messages.

$$\Lambda_{MR}^{DHCP} = \frac{2\sigma\delta_{DH}}{T_r} \quad (12)$$

2) *Location updates*: Each MR sends LU and refreshing updates to HA-MR which costs the following:

$$\Lambda_{MR}^{LU} = 2\sigma\eta_t\delta_L + 2\eta_r \left( \frac{N_m}{N_r} \right) \left( \sigma(\delta_L + \delta_{TH}) + \gamma_t \right) \quad (13)$$

3) *Binding updates to CNs*: Mobile nodes (LMNs and VMNs) send periodic refreshing BUs to the CNs through the MR updating the current address. This requires transmission of BU message through the wireless media with extra IP-header (encapsulation), and processing cost due to tunneling. Thus

$$\Lambda_{MR}^{BU} = 2\eta_r \left( \frac{N_c}{N_r} \right) (\omega_l + \omega_v) \left( \sigma(\delta_B + \delta_{TH}) + \gamma_t \right) \quad (14)$$

4) *MH's local registration messages*: Every subnet crossing by the MH (in every  $T_l$  sec from a MR region) triggers a local registration message towards the MR. This involves transmission and processing cost at MR.

$$\Lambda_{MR}^{LR} = \frac{N_m}{N_r} \times \frac{2\sigma\delta_R + \gamma_r}{T_l} \quad (15)$$

5) *Return routability messages*: To ensure the security of ongoing session MR will have to process and transmit RR messages on behalf of the mobile nodes under its domain which costs the following:

$$\Lambda_{MR}^{RR} = \frac{4\sigma(N_m/N_r)\delta_{RR}}{T_r} \quad (16)$$

6) *Data delivery cost*: In each session, an average of  $\lceil \frac{\alpha}{\kappa} \rceil$  data (and ACK) packets are sent from the CN to MNN or vice versa. As each MR manages of  $N_c/N_r$  sessions, total data / ACK packet arrival rate at the MR is  $\lambda_p = (N_c/N_r)\lambda_s \lceil \frac{\alpha}{\kappa} \rceil$ . Data packet delivery incurs transmission cost through the wireless media (with extra IP-header), and processing cost for the MR as follows:

$$\Lambda_{MR}^{DD} = \lambda_p \left( \sigma(\delta_{DT} + \delta_{DA} + \delta_{TH}) + \gamma_t \right) \quad (17)$$

7) *Total cost*: Therefore, total cost of each MR is obtained by adding Eqns. (12), (13), (14), (15) (16), and (17),

$$\Lambda_{MR} = \Lambda_{MR}^{DHCP} + \Lambda_{MR}^{LU} + \Lambda_{MR}^{BU} + \Lambda_{MR}^{LR} + \Lambda_{MR}^{RR} + \Lambda_{MR}^{DD} \quad (18)$$

## F. Complete Network

In order to compute the signaling load on the network as a whole, we consider all the resources (such as, bandwidth, processing power, etc.) consumed in all network entities.

1) *Query message*: Query messages exchanged between CN and HA (HA-MR or HA-MH) incur transmission cost of  $2N_c(h_p + h_{in} + h_p)\delta_Q\lambda_s$ . The searching cost in the HA-MR is  $(\omega_l + \omega_f)N_c\psi\lambda_s \log_2(N_r + N_l + N_f)$  and that in HA-MH is  $\omega_v N_c\psi\lambda_s \log_2 N_v$ . Thus cost of the network is,

$$\Lambda_{Net}^{QR} = \lambda_s N_c \left[ 2\delta_Q(2h_p + h_{in}) + \psi(\omega_l + \omega_f) \times \log_2(N_r + N_l + N_f) + \psi\omega_v \log_2 N_v \right] \quad (19)$$

2) *Local registration messages*: Every subnet crossing by the MH within a MR region, triggers a local registration which incurs transmission cost and processing cost for updating local location database.

$$\Lambda_{Net}^{LR} = N_m \frac{2\sigma\delta_R + \gamma_l}{T_l} \quad (20)$$

3) *Return routability messages*: The HoTI message follow the path between MR and HA which consists of  $(h_{in} + 2h_p)$  wired hops with one wireless hop. The path between HA and CN contains  $(h_{in} + 2h_p)$  wired hops. Similar cost is incurred for each HoT message. Each CoTI message is sent directly to CN from the MR which uses  $(h_{in} + 2h_p)$  wired hops and one wireless hop. Therefore, cost on the network for RR messages are as follows:

$$\Lambda_{Net}^{RR} = \frac{N_c}{T_r} \times 2\delta_{rr} \left( (h_{in} + 2h_p + \sigma) + (h_{in} + 2h_p) + (h_{in} + 2h_p + \sigma) \right) \quad (21)$$

4) *Location updates*: After each handoff, each MRs and LMNs send LU to the HA-MR and VMNs send LU to HA-MH informing the newly acquired IP address and prefixes. As the HA is  $(h_{in} + 2h_p + 1)$  hops (including  $h_p$  wireless hop) away from the MR, each LU from MR (and corresponding Ack) message incurs a transmission cost of  $\delta_L(h_{in} + 2h_p + \sigma)$ , and a lookup cost of  $\Psi_{HA-MR}^{LK}$  at the HA-MR. The LU messages from LMNs (or VMNs) travels one more wireless hop than

the MR with additional transmission cost for tunneling header and tunnel processing cost. Thus the cost of LU message on the network is given by,

$$\Lambda_{Net}^{LU} = 2N_r\delta_L\eta_t(h_p + h_{in} + h_p + \sigma) + 2(N_l + N_v)\eta_r \times \left( (\delta_L + \delta_{TH})(h_p + h_{in} + h_p + 2\sigma) + \gamma_t \right) + (\eta_t N_r + \eta_r N_l)\Psi_{HA-MR}^{LK} + \eta_t N_v\psi \log_2 N_v \quad (22)$$

5) *Binding updates to CNs*: The BU messages towards the CNs go through  $(h_{in} + 2h_p)$  wired hops and two wireless hop, on the average, to reach a CN. Thus cost required to send BU to CNs are given by,

$$\Lambda_{Net}^{BU} = 2N_c\eta_r(\omega_l + \omega_v) \left[ (h_{in} + 2h_p + 2\sigma) \times (\delta_B + \delta_{TH}) + \gamma_t \right] \quad (23)$$

6) *Data delivery cost*: The first data packet in a session goes through the HA (with tunneling) whereas the rest of the packets, that is,  $\left( \lceil \frac{\alpha}{\kappa} \rceil - 1 \right)$  packets use direct route (without tunneling). The path between a MNN and the HA contains  $(h_{in} + 2h_p)$  wired links and 2 wireless links whereas the path between HA and CN contains  $(h_{in} + 2h_p)$  wired links. In addition, data packets incur table lookup in HA-MR and HA-MH. Thus, the costs related to data delivery and processing by the network are given by

$$\Lambda_{Net}^{DD} = \lambda_s N_c \left[ \left( (h_{in} + 2h_p + 2\sigma) + (2h_p + h_{in}) \right) (\delta_{DT} + \delta_{DA} + 2\delta_{TH}) + 2\gamma_t + 2\omega_v\psi \log_2 N_v + 2\Psi_{HA-MR}^{LK} \right] + N_c\lambda_s \left( \left\lceil \frac{\alpha}{\kappa} \right\rceil - 1 \right) (h_{in} + 2h_p + 2\sigma) (\delta_{DT} + \delta_{DA}) \quad (24)$$

7) *Total cost of the network*: Therefore, total cost of the network can be obtained by adding Eqns. (19), (20), (21), (22), (23), and (24),

$$\Lambda_{Net} = \Lambda_{Net}^{QR} + \Lambda_{Net}^{LR} + \Lambda_{Net}^{RR} + \Lambda_{Net}^{LU} + \Lambda_{Net}^{BU} + \Lambda_{Net}^{DD} \quad (25)$$

## IV. RESULTS

In this section, we present numerical results to demonstrate the impact of network size, mobility rate, traffic rate and data volume on the total cost of various mobility management entities. The values for the system parameters have been taken from the previous works [5], [7]:  $\delta_L = 0.6$ ,  $\delta_B = 0.6$ ,  $\delta_Q = 0.6$ ,  $\delta_{DH} = 1.4$ ,  $\delta_{RR} = 0.6$ ,  $\delta_{DT} = 5.72$ ,  $\delta_{DA} = 0.60$ ,  $\delta_{TH} = 0.40$ ,  $\sigma = 10$ ,  $\lambda_s = 0.01$ ,  $\gamma_t = 10$ ,  $N_c = N_{mnn}$ ,  $h_{in} = 5$ ,  $h_p = 1$ ,  $T_r = 70s$ ,  $T_e = 60s$ ,  $\psi = 0.3$ ,  $\alpha = 10Kb$ , and  $\kappa = 576b$ ,  $N_r = 20$ ,  $N_f = 70$ ,  $N_l = 100$ ,  $N_v = 100$ ;  $N_m = 200$ .

### A. HA-MR

In Fig. 2(a), the total cost of the HA-MR is shown for varying number of mobile hosts and different subnet residence times. Here we have used equal number of LMNs and VMNs. It is found that total cost of HA-MR increases for higher number of mobile hosts and higher residence times. When subnet residence time increases, refreshing binding cost increases although cost related to handoff reduces due to less handoff frequency. Other

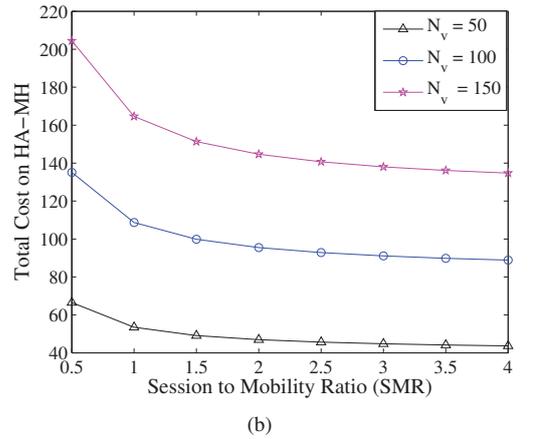
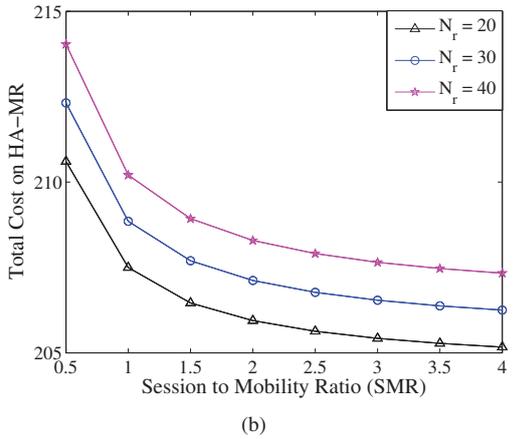
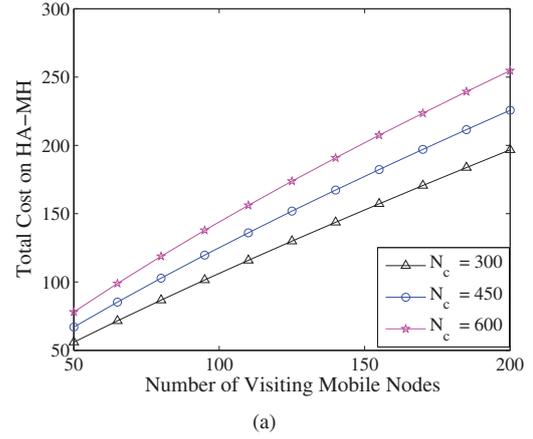
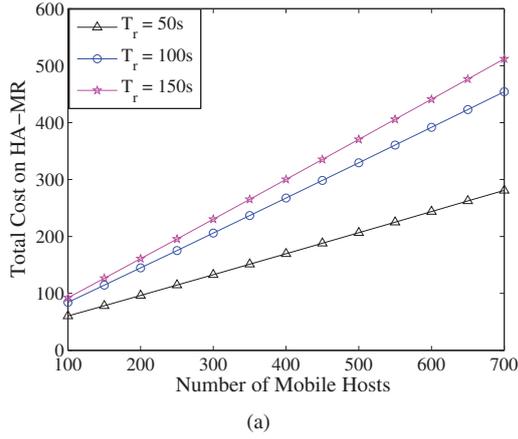


Fig. 2. (a) Impact of number of mobile hosts on the total cost on the HA-MR for different subnet residence times and (b) Impact of SMR on the total cost of the HA-MR for different number of MRs.

Fig. 3. (a) Impact of number of VMNs on the total cost of the HA-MH for different number of CNs, (b) Impact of SMR on the total cost of the HA-MH for different number of VMNs.

costs (query and data delivery) remain unchanged. The net result is increase of total cost.

In Fig. 2(b), the total cost of the HA-MR is shown as a function of Session to Mobility Ratio (SMR) which is defined as  $\lambda_s \times T_r$ . We keep  $\lambda_s$  constant while varying the value of  $T_r$  between 50 to 400 sec. Increase of SMR value implies higher subnet residence times of the mobile network, producing less signaling relating to LUs. In addition, the presence of higher number of MRs results in more LUs, thus increasing the total cost of HA-MR.

## B. HA-MH

Fig. 3(a) shows the impact of number of VMNs on the total cost of HA-MH for varying number of CNs. As number of VMNs increases, data packets are sent through the HA-MH along with higher number of LU and RR messages. In addition, higher number of CNs implies in higher query messages exchanged between HA-MH and CN, thus producing higher cost for HA-MH.

Fig. 3(b) shows the impact of SMR on the total cost of the HA-MH for different number of VMNs. Total cost decreases with higher SMR values (that is, when mobility rate of MN is low). The changes of total cost is very small as the total cost is dominated by the data delivery cost which is independent of subnet residence time.


## C. MR

In Fig. 4(a), the total cost of each MR is shown for varying number of mobile hosts and LFNs. Increase in LFNs results in constant shifting of the total cost graph due to the increase in query message cost and data delivery cost. In Fig. 4(b), the impact of SMR on the total cost of each MR is shown for varying session lengths. Higher session length causes more data packets to be routed through each MR, resulting in higher cost. The total cost is found to be invariant of SMR due to the dominance of data delivery cost.


## D. Complete Network

Fig. 5(a), the total cost of the complete network is shown as function of number of mobile hosts. Increased number of hosts sends higher number of location updates, binding updates; in addition, query for the MHs are also increased. The total cost is also shown for different number of hops in the Internet (e.g.,  $h_{in} = 5, 15$  and  $25$ ). The rate of increase of total cost is proportional to  $h_{in}$  since its value influences all the costs.

In Fig. 5(b), total cost of the network is shown as a function of SMR for different session lengths. It is found that the total cost does not vary much (around 1%) with respect to SMR. This implies that data delivery cost

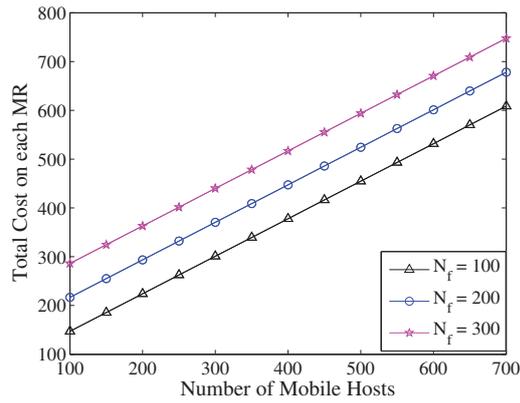

(a)

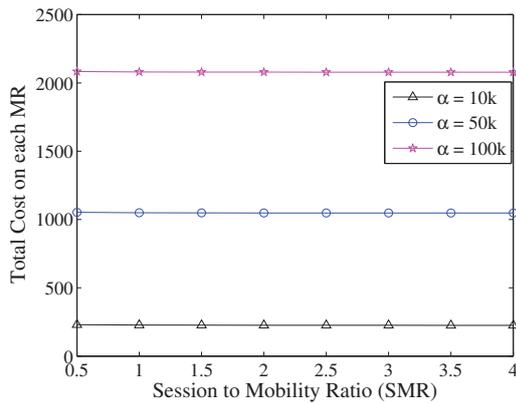

(b)

Fig. 4. (a) Impact of number of mobile hosts on the total cost of each MR for different number of LFNs, (b) Impact of SMR on the total cost of each MR for different session lengths.


(through optimized and unoptimized route) dominates the total cost.

## V. CONCLUSION


In this paper, we have developed a mathematical model to estimate the total cost of various mobility management entities of NEMO BSP considering all possible costs that influence their operation. We have presented numerical results to show the impact of network size, mobility rate, and traffic rate on those mobility entities. It is found that total cost on various entities increases for smaller session length as there is more signaling traffic compared to data traffic. In addition, the cost on various entities does not vary much with respect to session to mobility ratio due to the dominance of data delivery cost over signaling costs. The cost analysis presented in this paper will help network engineers in estimating actual resource requirements for the key entities of the network in future design while optimizing network performance.

## VI. ACKNOWLEDGEMENT

The research reported in this paper was funded by NASA Grant NNX06AE44G.

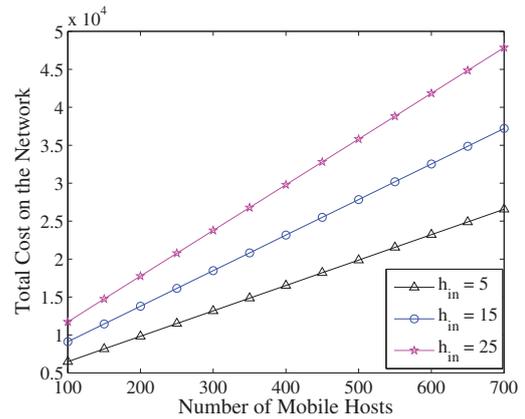

(a)

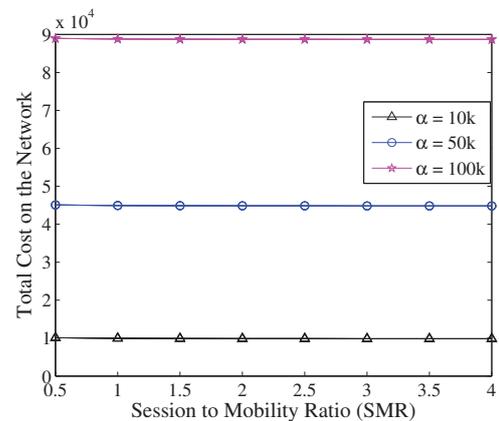

(b)

Fig. 5. (a) Impact of number of mobile hosts on the total cost of the network for different number of hops in Internet, (b) Impact of SMR on the total cost of the network for different session lengths.

## REFERENCES

- [1] V. Devarapalli, R. Wakikawa, A. Petrescu, and P. Thubert, "Network MObility (NEMO) basic support protocol," RFC 3963, Jan 2005.
- [2] D. Johnson, C. E. Perkins, and J. Arkko, "Mobility support in IPv6," IETF RFC 3775, June 2004.
- [3] J. Xie and I. Akyildiz, "A novel distributed dynamic location management scheme for minimizing signaling costs in Mobile IP," *IEEE Transactions on Mobile Computing*, vol. 1, no. 3, pp. 163–175, July 2002.
- [4] S. Fu and M. Atiquzzaman, "Signaling cost and performance of SIGMA: A seamless handover scheme for data networks," *Wireless Communication and Mobile Computing*, vol. 5, no. 7, pp. 825–845, Nov 2005.
- [5] A. S. Reaz, P. K. Chowdhury, and M. Atiquzzaman, "Signaling cost analysis of SINEMO: Seamless End-to-End Network Mobility," in *First ACM/IEEE International Workshop on Mobility in the Evolving Internet Architecture*, San Francisco, CA, Dec 01, 2006.
- [6] C. Makaya and S. Pierre, "An analytical framework for performance evaluation of IPv6-based mobility management protocols," *IEEE Transactions on Wireless Communications*, vol. 7, no. 3, pp. 972–983, March 2008.
- [7] P. Chowdhury, A. Reaz, M. Atiquzzaman, and W. Ivancic, "Performance analysis of SINEMO: Seamless IP-diversity based Network Mobility," in *ICC 2007*, Glasgow, Scotland, June 24–28, 2007.